

Quick Guide



Thank you for choosing

Asante Garage Door Opener with Camera Kit

For first time installation, please make sure that the Asante products and your router are within close proximity to each other. Once configured, they can be moved to desired locations.



Asante Home Extender
ports and lights



Power



Wireless Pairing Light




Cloud Light



Wifi Wireless
Connectivity Light



Signal Strength
Light for Wireless

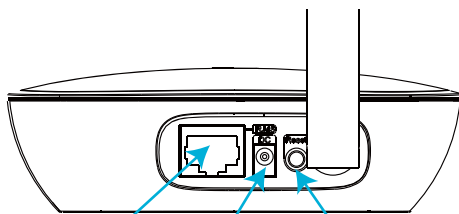

Ethernet port to
connect to your
personal router

Power

Factory default reset
button (hold down for 6
seconds to reset to default)



Asante Garage Door
Opener with Camera
ports and lights




Wifi Wireless
Connectivity Light



Signal Strength
Light for Wireless



Power

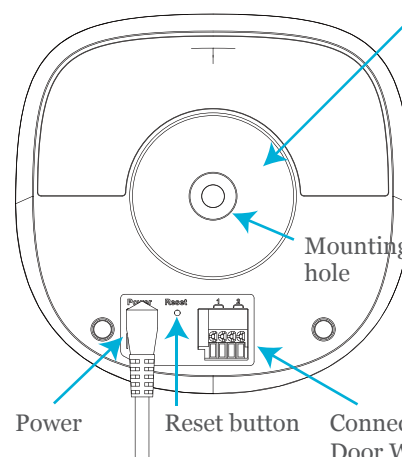

Fastening wheel

This wheel is meant
to move freely to be
able to remove and
install camera while
the wires are still
attached.

Mounting
hole

Power


Reset button

Connection to Garage
Door Wall mount button

Step 1

Connection to the router


Using the RJ45 Ethernet cable provided, connect the Asante Home Extender to a LAN port on your router.



Step 2

Power

1. Connect the power to Asante Home Extender and make sure power light comes on.
2. Cloud light comes on usually after 1 to 3 minutes depending on the Internet connection.



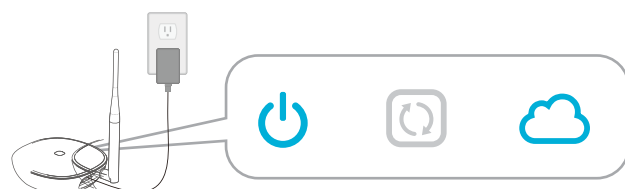


Step 3

Download app and device discovery

*Connect Smartphone to same WiFi router that Asante Home Extender is connected to.




1. Scan the QR code to download free app from Apple Store or Google Play. Or, simply search for **Asante Smart Home**.

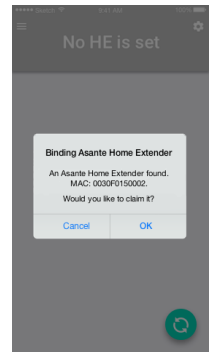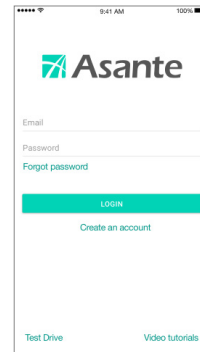

2. Create an account and sign in
3. Claim your first Asante Home Extender when prompted

* If your Smartphone can not connect to same WiFi router, use the procedure below to manually add device.



1. Login to app and click the menu button as shown
2. Click on the overflow button and select Add Home Extender
3. Enter the MAC address that appears on the back of Asante Home Extender in the fields provided and click on SUBMIT

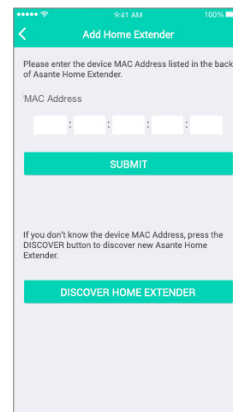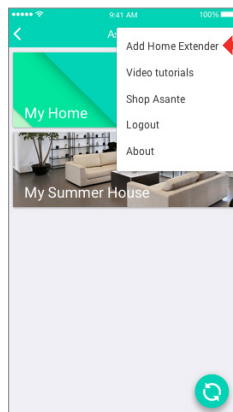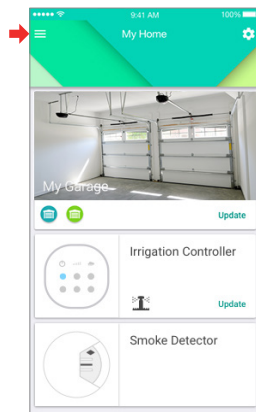

Step 4

Setup of Garage Door Opener with Camera

1. Connect the power to your new Asante Garage Door Opener with Camera.
2. LED lights on Asante Garage Door Opener with Camera will start to blink indicating WiFi pairing with Asante Home Extender.
3. Asante Home Extender pairing light will blink until the wireless connection has been established.
4. Claim your first Garage Door Opener with Camera when prompted in the app.
5. Disconnect the power and move it to your desired location to prepare for installation.

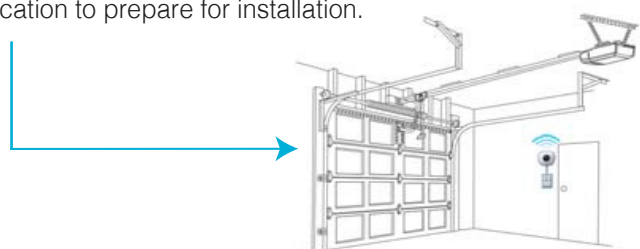


Step 5

Attaching Garage Door Opener with Camera to your current garage door wall mount button

! We recommend to unplug your garage door electric motor from the AC power during the installation.

Each Garage Door Opener with Camera can control up to two garage doors.

1. Using one set of wires (provided), insert tips into the green connector.

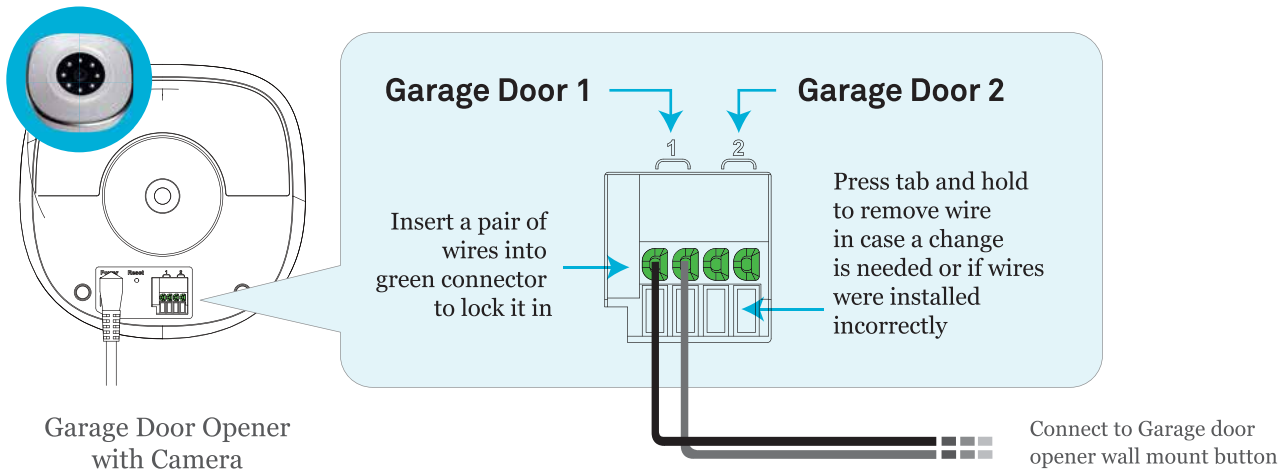


2. Connect the other side of wires to garage door opener's wall mount button (see orange arrow below).

Note that the wires from Garage Door Opener with Camera need to co-exist with previous wires that were attached to the garage door motor.

For wiring instruction of wall mount button please see **"Wall Mount Buttons Reference Guide"**

(One pair of wire needed for one door)

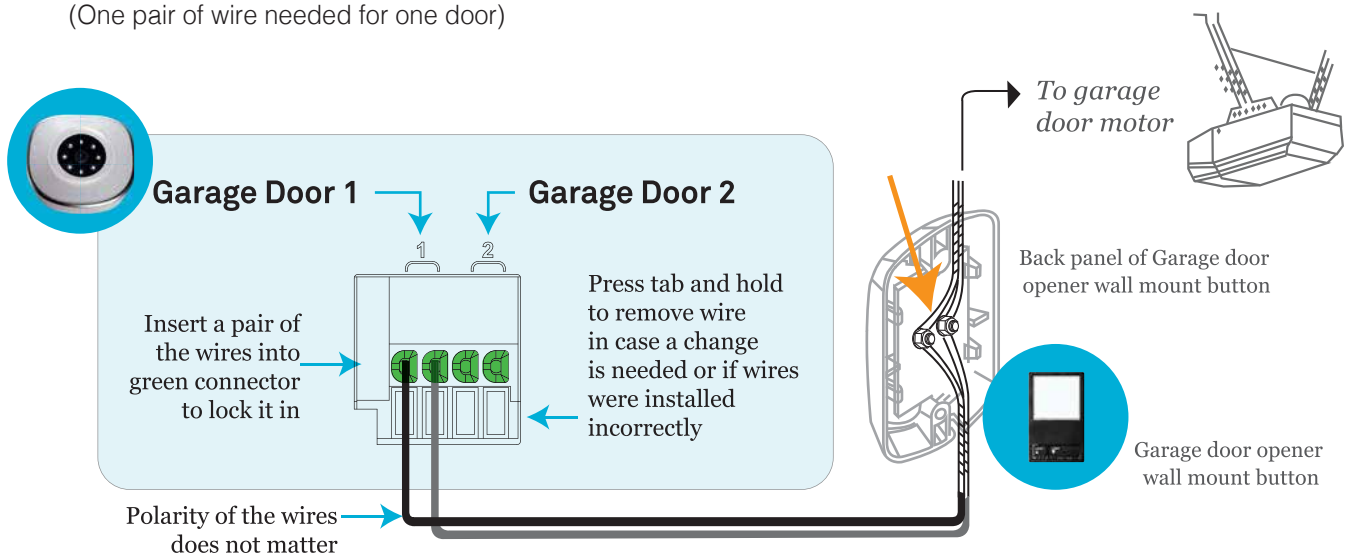


3. Reconnect the power to your garage door motor and to Asante Garage Door Opener with Camera.

4. Wait until the WiFi lights on Garage Door Opener with Camera are established.

5. Before mounting the Garage Door Opener with Camera at desired location, login to app and make sure you can see the video. Also press the button to see if the garage door can be closed or opened.

This concludes the installation of Garage Door Opener with Camera.



Step 6

Mounting instruction for Garage Door Opener with Camera

1. Hold the mounting base against the wall and mark the screw holes using a pen.
Pay close attention to make sure the camera's location can cover your garage doors.
Using the screws provided attach the base to the wall (Figure 1).
2. With wires connected to the Garage Door Opener with Camera, attach the camera to the base.
To fasten, you need to turn the screw knob clockwise (Figure 2).
3. To pan or tilt the camera, hold the camera, pull gently and move it (excessive pull and twisting will damage the mounting unit).




Figure 1





Figure 2

Step 7


WiFi setup for Asante Home Extender (Optional)

Asante Home Extender wireless bridge mode can extend your wireless coverage in a large size property. For areas larger than 5000 sq.ft, consider placing the Asante Home Extender in a central location to bridge Asante devices into your home router. Otherwise we strongly recommend using the Ethernet wired mode. If you still want to use the wireless option, please follow the procedure below.

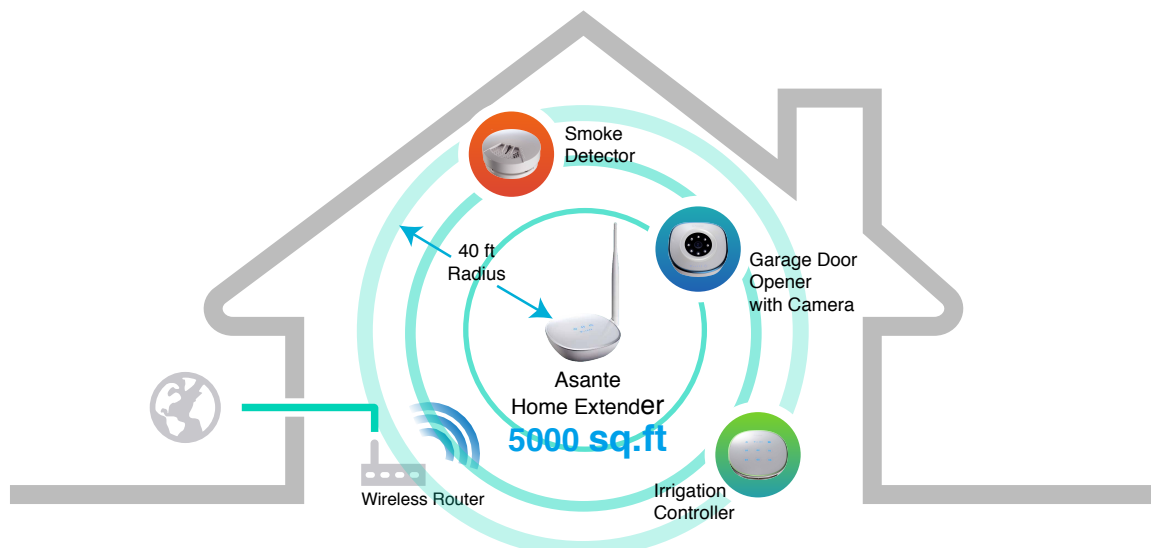

Use wireless connection to maximize the WiFi coverage. Asante Home Extender can cover up to 5000 sq.ft

1. Login to app and select the settings button as shown below
2. Select WiFi manager
3. Select your home router from the list
4. Enter your personal wireless password that has been setup on your router when prompted

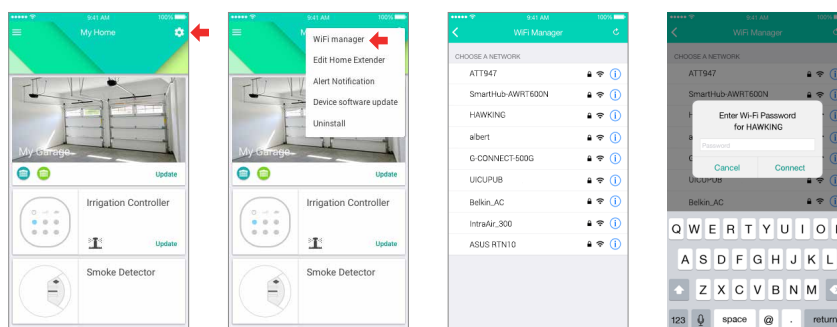

Once connected, you can disconnect the Ethernet cable between the Asante Home Extender and router and move the Asante Home Extender to appropriate location. The lights on the Asante Home Extender will indicate a wireless signal.